


Dbudget

Fine Pitch LED Display






Cable free connection
Quick set up and dismantle

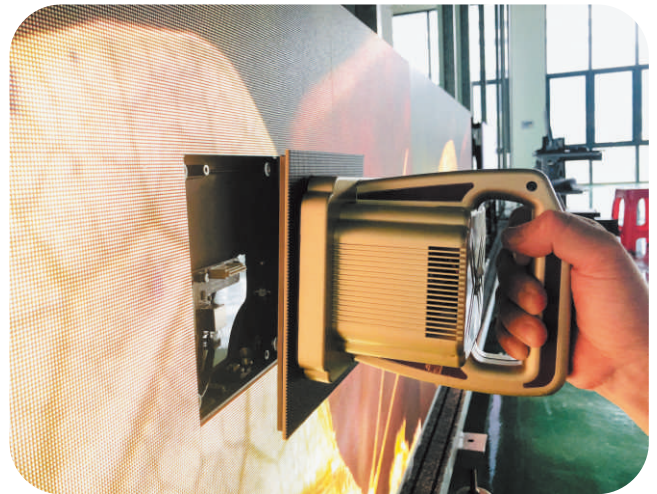

Front installation
Front maintenance

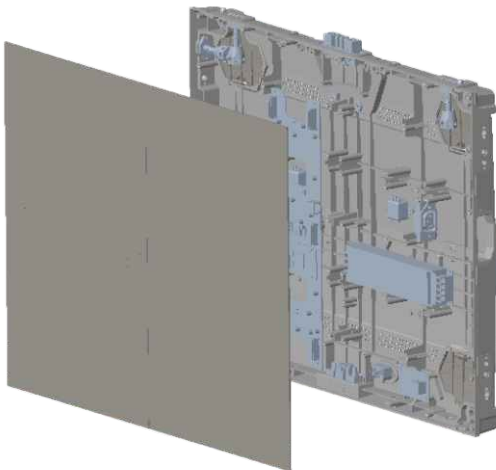

Power backup
Signal backup



Ultra Thin

Application Range

- Medical system
- Command system.
- Transportation system
- Broadcasting system
- Securities system
- Perform system.
- Network system.
- Monitoring system



Parameters

Item	P1.25	P1.56	P1.83	P2.5
Pixel pitch:mm	1.25	1.56	1.83	2.5
Pixel density:pixels/sqm	640000	406406	295664	160000
Brightness:nits	600	600	600	600
Scanning mode:	Constant current drive			
Working environment:	Indoor	Indoor	Indoor	Indoor
Operating temperature:	-30°C~60°C	-30°C~60°C	-30°C~60°C	-30°C~60°C
Viewing angle:	H/ V:160°	H/V:160°	H/ V:160°	H/V:160°
Module size:mm	320 x 160	320 x 160	320 x 160	320 x 160
Cabinet resolution:pixels	512 x 384	408 x 306	348 x 261	256 x 192
Cabinet size:mm	640 x 480	640 x 480	640 x 480	640 x 480
Thickness Cabinet:mm	45	45	45	45
Waterproof level:	IP34	IP34	IP34	IP34
Average/Max power: w/sqm	165/550	165/550	165/550	165/550
Refresh rate:Hz	≤3840	≤3840	≤3840	≤3840
Net weight: kgs	7.5	7.5	7.5	7.5



Our company has applied for a number of patents,
And own completely own intellectual property rights.



Decai Visual Co.,Ltd.

Add : 1-2 Floor, Block 5D, Skyworth Innovation Valley, Baoan District, Shenzhen, China.

Web : www.decvisual.com

Tel : + 86 755 2328 1824

E-mail : sales@decvisual.com